


# External Spiral Brush

Worksheet [R. 09.2015]

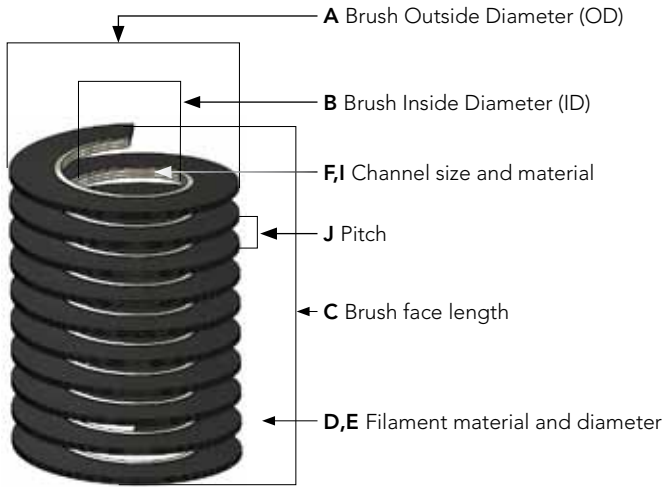

Contact Name: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_



## CHANNEL DIMENSIONS

Section	X		Y	
	in	mm	in	mm
A	0.095	2.413	0.110	2.794
B	0.150	3.810	0.152	3.861
C	0.180	4.572	0.199	5.055
D	0.240	6.096	0.256	6.502
F	0.313	7.950	0.313	7.950
G	0.350	8.890	0.370	9.398
K	0.500	12.700	0.500	12.700

### IMPORTANT:

For printing and packaging applications where density and trim are critical, always contact a Sealeze Representative for assistance.

## Specifications

Quantity: \_\_\_\_\_ Annual Usage: \_\_\_\_\_

RPM: \_\_\_\_\_

Application: \_\_\_\_\_

### Brush Specifications:

A. Outside Diameter: \_\_\_\_\_

B. Inside Diameter: \_\_\_\_\_

### Circle the Critical Dimension:

OD    ID

C. Brush Face Length: \_\_\_\_\_

D. Filament Material\*: \_\_\_\_\_

E. Filament Diameter: \_\_\_\_\_

Level (flat) \_\_\_\_\_ Crimped (wavy) \_\_\_\_\_

F. Channel Size: A B C D F G K

Density: Light    Medium    Heavy

Stiffness: Soft    Medium    Stiff

### I. Channel Material:

Galvanized, T-304 S/S, Other S/S available on request

J. Pitch†: Tight Wound?    Yes    No

Or specify the distance between center of consecutive turns \_\_\_\_\_

### Circle one:

Right Hand Wound

Left Hand

\* Consult your Sealeze Representative for available materials.