

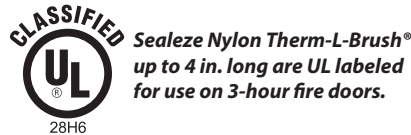
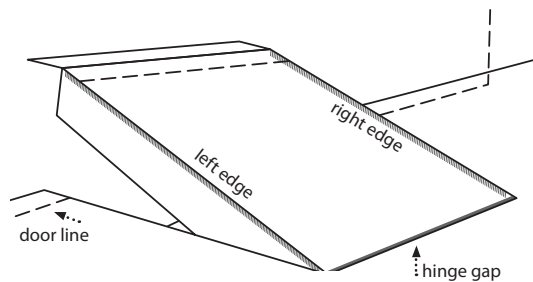


Dock Leveler

WORKSHEET
WSDL.0909


Typical Application

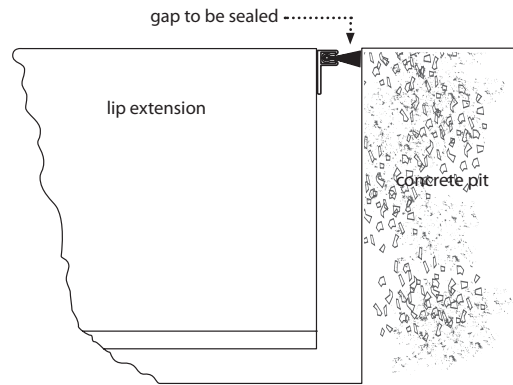

Brush with T-shaped weldable steel holder



Rubber gasket with weldable steel holder

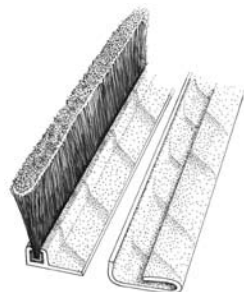

Brush with L-shaped weldable steel holder

Contact Name: _____

Company Name: _____

Phone: _____

Fax: _____

Email: _____

Perimeter Gap Length

Measure the length of the right and left outer edges and record the measurement below.

Right Outer Edge (indicate in. or mm): _____

Left Outer Edge (indicate in. or mm): _____

Hinge Gap Length

Measure the length of the hinge and record the measurement below.

Hinge length (indicate in. or mm): _____

Perimeter Gap Width

Measure the gap between the leveler lip extension and the concrete pit. Record your measurement below.

Perimeter Gap Width (indicate in. or mm): _____

Check Type of Dockleveler Seal Required

- Brush with angled aluminum holder (length of brush is determined by the gap size)
- Brush with weldable T-shaped steel holder (for gaps less than 1 1/2 inches)
- Brush with weldable L-shaped steel holder (for gaps less than 1 1/2 inches)
- Rubber gasket with weldable steel holder (for gaps less than 1 1/2 inches)
- Neoprene rope hinge seal, 1" dia. (seals hinge gaps up to 3/4 in.)
- Foam block hinge seal, 2" x 3" (seals hinge gaps up to 2 1/2 in.)



8000 Whitepine Road
Richmond, VA 23237

phone: 804-743-0982
fax: 804-743-3413

toll free
phone: 800-787-7325
fax: 800-448-2908