


# Cup Seal

Worksheet [R. 02.2015]

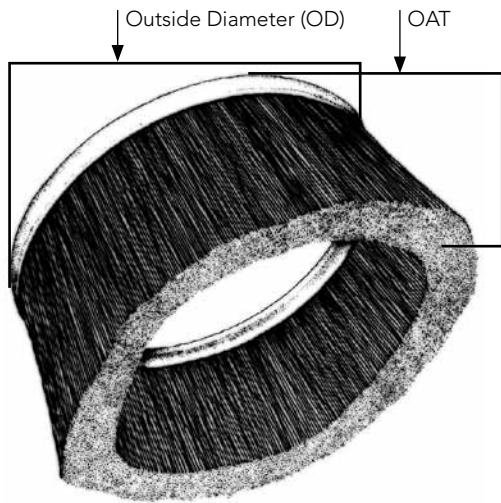

Contact Name: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_



## CHANNEL DIMENSIONS

Section	X		Y	
	in	mm	in	mm
A	0.095	2.413	0.110	2.794
B	0.150	3.810	0.152	3.861
C	0.180	4.572	0.199	5.055
D	0.240	6.096	0.256	6.502
F	0.313	7.950	0.313	7.950
G	0.350	8.890	0.370	9.398
K	0.500	12.700	0.500	12.700



## MINIMUM OD FOR CUP SEALS

Section	Product Code *	Galvanized Channel		Stainless Channel		Stainless Filament	
		in.	mm	in.	mm	in.	mm
A	CFA1	1.000	25.400	1.500	38.100	1.750	44.450
B	CFB1	1.250	31.750	1.750	44.450	2.500	63.500
C	CFC1	1.500	38.100	2.000	50.800	3.250	82.550
D	CFD1	2.000	50.800	3.000	76.200	4.000	101.600
F	CFF1	2.750	69.850	3.625	92.075	4.625	117.475
G	CFG1	3.000	76.200	4.000	101.600	5.000	127.000
K	CFK1	10.000	254.000	12.000	304.800	15.000	381.000

\* T-304 S/S Channel change "1" to "2". Other S/S available on request

## Specifications

Quantity: \_\_\_\_\_

Annual Usage: \_\_\_\_\_

Channel Material: \_\_\_\_\_

Galvanized, T-304 S/S, Other S/S available on request

Filament Material: \_\_\_\_\_

Level or Crimped: \_\_\_\_\_

Filament Diameter: \_\_\_\_\_

Outside Diameter: \_\_\_\_\_

OAT: \_\_\_\_\_

Application: \_\_\_\_\_