


External Arc with Aluminum Holders

Worksheet [R. 02.2015]

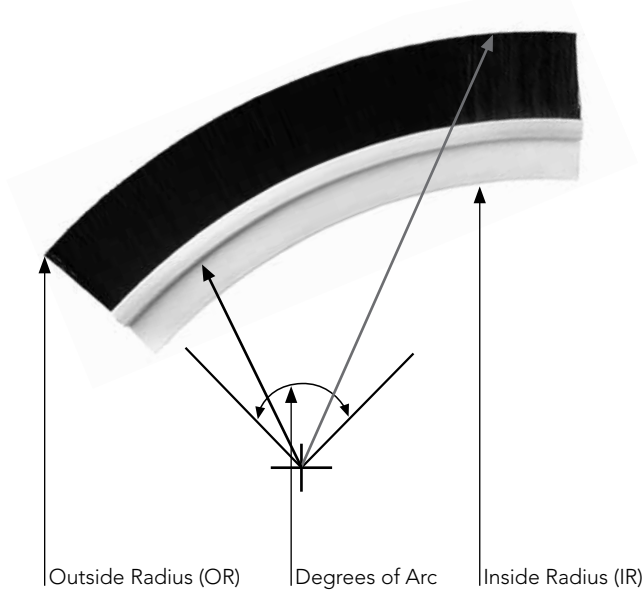

Contact Name: _____

Company Name: _____

Phone: _____

Fax: _____

Email: _____



CHANNEL DIMENSIONS

Section	X		Y	
	in	mm	in	mm
A	0.095	2.413	0.110	2.794
B	0.150	3.810	0.152	3.861
C	0.180	4.572	0.199	5.055
D	0.240	6.096	0.256	6.502
F	0.313	7.950	0.313	7.950
G	0.350	8.890	0.370	9.398
K	0.500	12.700	0.500	12.700

MINIMUM IR for EXTERNAL ARC with FORMED ALUMINUM HOLDERS

Section	Product Code *	180°		90°		Angled Holders
		in	mm	in	mm	
A	EAA1	2.500	63.500	2.000	50.800	On Application
B	EAB1	3.000	76.200	2.500	63.500	On Application
C	EAC1	3.500	88.900	3.000	76.200	On Application
D	EAD1	3.750	95.250	3.250	82.550	On Application
F	EAF1	On App.	On App.	On App.	On App.	On Application
G	EAG1	5.000	127.000	4.000	101.600	On Application
K	EAK1	On App.	On App.	On App.	On App.	On Application

* T-304 S/S Channel change "1" to "2". Other S/S available on request

Specifications

Quantity: _____

Annual Usage: _____

Channel Material: _____

Galvanized, T-304 S/S, Other S/S available on request

Holder Product Code: _____

(see Sealeze Catalog or web site)

External Arc Product Code: _____

Filament Material: _____

Level or Crimped: _____

Filament Diameter: _____

Degrees of Arc: _____

OR (Outside Radius): _____

IR (Inside Radius): _____

Hole Diameters: _____

Hole Location: _____

Please Circle the Critical Dimension:

OR IR

Application: _____