

# Ez-Flex® Strip Brush [ENGLISH Measurements]

## Worksheet [R. 04.2015]



All measurements in inches unless specified.



Contact Name: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

### Specifications- Custom Run

(1000 ft. minimum for custom orders)

Annual Usage (total feet): \_\_\_\_\_

Product Code: \_\_\_\_\_

Filament Diameter:

**C Channel (level only):** \_\_\_\_\_  
(0.004 in to 0.016 in)

**D Channel (level or crimped):** \_\_\_\_\_  
(0.004 in to 0.020 in)

OAT: \_\_\_\_\_

Exposed: \_\_\_\_\_

**Channel material**

Nylon

Quantity: \_\_\_\_\_

Cut length (if less than 100 ft): \_\_\_\_\_

Application: \_\_\_\_\_

*Due to the nature of extruded plastic materials, please note the dimensional tolerances and take these into consideration when incorporating these products into your design.*


Ez-Flex is available with other filament diameters. Please ask your sales representative for details. Standard brush material is Nylon (code BL). Crimped filament is available on D section. Ez-Flex flexible strip brush with integrated holder can be provided as individual strips cut to your specifications.



### Channel Dimensions

Section	X*		Y*	
	in	mm	in	mm
C	0.180	4.572	0.200	5.080
D	0.230	5.842	0.245	6.223

\* Tolerance for C & D sections, ± 0.02 inches.



Flexible Brush



Flexible Brush with Aluminum Holder

### Flexible Strip Brush- Stock

Section	Product Code Nylon	Standard Filament Diameter	X*	Y*	OAT ±0.015	Standard Length(feet)
C	FXC110BL	0.006	0.180	0.200	1.28	100
D	FXD109BL	0.008	0.230	0.245	1.25	100
	FXD116BL	0.012	0.230	0.245	1.92	100
	FXD130BL	0.012	0.230	0.245	3.31	100

\* Tolerance for C & D sections, ± 0.02 inches.

See reverse for Ez-Flex brush with Integrated Holder. Ez-Flex strip brush will fit in Sealeze aluminum holders. Please visit our website at [sealeze.com/ind/holders.html](http://sealeze.com/ind/holders.html) for complete information.

# Ez-Flex® Strip Brush with Integrated Holder [ENGLISH]



Worksheet [R. 04.2015]

All measurements in inches unless specified.




Contact Name: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

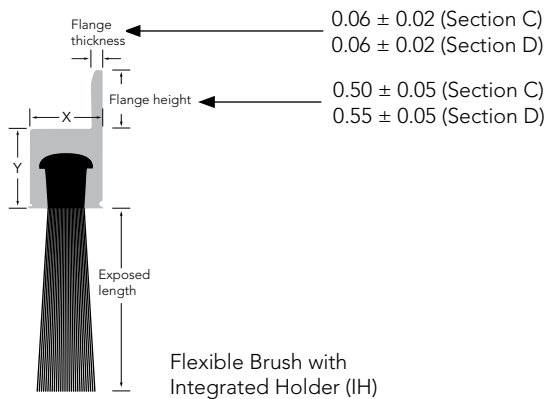

## Specifications- Custom Run

(1000 ft. minimum for custom orders)

Annual Usage (total feet): \_\_\_\_\_

Product Code: \_\_\_\_\_

Filament Diameter:

C Channel (level only): \_\_\_\_\_  
 (0.004 in to 0.016 in)

D Channel (level or crimped): \_\_\_\_\_  
 (0.004 in to 0.020 in)

OAT: \_\_\_\_\_

Exposed: \_\_\_\_\_

Channel material\*

Nylon

Quantity: \_\_\_\_\_

Cut length (if less than 100 ft): \_\_\_\_\_

Application: \_\_\_\_\_

## Flexible Strip Brush with Integrated Holder- Stock

Section	Product Code Nylon	Standard Filament Diameter	X*	Y*	Flange Thickness $\pm 0.01$	Flange Height $\pm 0.06$	Exposed <sup>†</sup> $\pm 0.015$	Standard Continuous Length (feet)
C	FXC80IH10BL	0.006	0.18	0.19	0.06	0.50	1.03	10
D	FXD80IH09BL	0.008	0.22	0.25	0.06	0.55	0.93	10
	FXD80IH16BL	0.012	0.22	0.25	0.06	0.55	1.60	10
	FXD80IH30BL	0.012	0.22	0.25	0.06	0.55	2.99	10

\* Tolerance for C section;  $\pm 0.01$ . Tolerance for D section;  $\pm 0.02$  inches

† Exposed filament from bottom of integrated holder (filament length)

*Due to the nature of extruded plastic materials, please note the dimensional tolerances and take these into consideration when incorporating these products into your design.*

Ez-Flex is available with other filament diameters. Please ask your sales representative for details. Standard brush material is Nylon (code BL). Crimped filament is available on D section. Ez-Flex flexible strip brush with integrated holder can be provided as individual strips cut to your specifications.