

# Ez-Flex® Strip Brush [METRIC]

Worksheet [R. 05.2015]



All measurements in millimeters unless specified.



Contact Name: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

## Specifications

Annual Usage (total feet): \_\_\_\_\_

Product Code: \_\_\_\_\_

Filament:

**C Channel (level only):** \_\_\_\_\_  
(0.004 in to 0.016 in)

**D Channel (level or crimped):** \_\_\_\_\_  
(0.004 in to 0.020 in)

**Channel material\***

Nylon

**Filament Diameter:** \_\_\_\_\_

**Quantity:** \_\_\_\_\_

**Cut length if less than 100 ft:** \_\_\_\_\_

**Application:** \_\_\_\_\_

\* Integrated holder and filament are of the same material.

*Due to the nature of extruded plastic materials, please note the dimensional tolerances and take these into consideration when incorporating these products into your design.*


Ez-Flex is available with other filament diameters. Please ask your sales representative for details. Standard brush material is Nylon (code BL). Crimped filament is available on D section. Ez-Flex flexible strip brush can be provided in continuous lengths in rolls (typically 30.5 m) or as individual strips cut to your specifications.



### Channel Dimensions

Section	X*		Y*	
	in	mm	in	mm
C	0.180	4.572	0.200	5.080
D	0.230	5.842	0.245	6.223

\* Tolerance for C & D sections, ±0.49 mm.



Flexible Brush



Flexible Brush with Aluminum Holder

### Flexible Strip Brush

Section	Product Code Nylon	Standard Filament Diameter	X*	Y*	OAT ±0.015	Standard Continuous Length (meters)
C	FXC106BL	0.15	4.572	5.080	22.10	30.5
	FXC110BL	0.15	4.572	5.080	32.51	30.5
D	FXD109BL	0.20	5.842	6.223	31.75	30.5
	FXD112BL	0.20	5.842	6.223	38.10	30.5
	FXD116BL	0.30	5.842	6.223	48.77	30.5
	FXD120BL	0.30	5.842	6.223	58.67	30.5
	FXD130BL	0.30	5.842	6.223	84.07	30.5

\* Tolerance for C & D sections, ±0.49 mm.

See reverse for Ez-Flex brush with Integrated Holder. Ez-Flex strip brush will fit in Sealeze aluminum holders. Please visit our website at [sealeze.com/ind/holders.html](http://sealeze.com/ind/holders.html) for complete information.

# Ez-Flex® Strip Brush with Integrated Holder [METRIC]

Worksheet [R. 05.2015]



All measurements in millimeters unless specified.




Contact Name: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

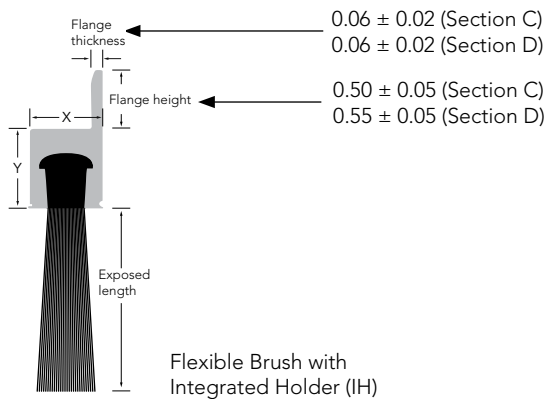

## Specifications

Annual Usage (total feet): \_\_\_\_\_

Product Code: \_\_\_\_\_

### Filaments

C Channel (level only): \_\_\_\_\_  
(0.004 in to 0.016 in)

D Channel (level or crimped): \_\_\_\_\_  
(0.004 in to 0.020 in)

### Channel material\*

Nylon

Filament Diameter: \_\_\_\_\_

Quantity: \_\_\_\_\_

Cut length if less than 100 ft: \_\_\_\_\_

Application: \_\_\_\_\_

\* Integrated holder and filament must be of the same material.

*Due to the nature of extruded plastic materials, please note the dimensional tolerances and take these into consideration when incorporating these products into your design.*

Ez-Flex is available with other filament diameters. Please ask your sales representative for details. Standard brush material is Nylon (code BL). Crimped filament is available on D section. Ez-Flex flexible strip brush can be provided in continuous lengths in rolls (typically 30.5 m) or as individual strips cut to your specifications.

## Flexible Strip Brush with Integrated Holder

Section	Product Code Nylon	Standard Filament Diameter	X <sup>‡</sup>	Y <sup>‡</sup>	Flange Thickness ±0.02	Flange Height ±0.05	Exposed <sup>§</sup> ± 0.015	Standard Continuous Length (meters)
C	FXC80IH06BL	0.15	4.57	4.83	1.52	12.70	15.75	3.05
	FXC80IH10BL	0.15	4.57	4.83	1.52	12.70	26.16	3.05
D	FXD80IH09BL	0.20	5.59	6.35	1.52	13.97	23.62	3.05
	FXD80IH12BL	0.20	5.59	6.35	1.52	13.97	29.97	3.05
	FXD80IH16BL	0.30	5.59	6.35	1.52	13.97	40.64	3.05
	FXD80IH20BL	0.30	5.59	6.35	1.52	13.97	50.55	3.05
	FXD80IH30BL	0.30	5.59	6.35	1.52	13.97	75.95	3.05

<sup>‡</sup> \* Tolerance for C section; ±0.25 mm. Tolerance for D section ± 0.49 mm.

<sup>§</sup> Exposed filament from bottom of integrated holder (filament length)