

Ez-Flex® Strip Brush [ENGLISH]

Worksheet [R. 04.2015]



All measurements in inches unless specified.



Contact Name: _____

Company Name: _____

Phone: _____

Fax: _____

Email: _____

Specifications

Annual Usage (total feet): _____

Product Code: _____

Filament:

C Channel (level only): _____
(0.004 in to 0.016 in)

D Channel (level or crimped): _____
(0.004 in to 0.020 in)

Channel material*

Nylon

Filament Diameter: _____

Quantity: _____

Cut length if less than 100 ft: _____

Application: _____

* Integrated holder and filament are of the same material.

Due to the nature of extruded plastic materials, please note the dimensional tolerances and take these into consideration when incorporating these products into your design.

Ez-Flex is available with other filament diameters. Please ask your sales representative for details. Standard brush material is Nylon (code BL). Crimped filament is available on D section. Ez-Flex flexible strip brush can be provided in continuous lengths in rolls (typically 100 feet) or as individual strips cut to your specifications.



Channel Dimensions

Section	X*		Y*	
	in	mm	in	mm
C	0.180	4.572	0.200	5.080
D	0.230	5.842	0.245	6.223

* Tolerance for C & D sections, ± 0.02 inches.



Flexible Brush



Flexible Brush with Aluminum Holder

Flexible Strip Brush- Stock

Section	Product Code Nylon	Standard Filament Diameter	X*	Y*	OAT ±0.015	Standard Continuous Length (feet)
C	FXC106BL	0.006	0.180	0.200	0.87	100
	FXC110BL	0.006	0.180	0.200	1.28	100
D	FXD109BL	0.008	0.230	0.245	1.25	100
	FXD112BL	0.008	0.230	0.245	1.50	100
	FXD116BL	0.012	0.230	0.245	1.92	100
	FXD120BL	0.012	0.230	0.245	2.31	100
	FXD130BL	0.012	0.230	0.245	3.31	100

* Tolerance for C & D sections, ± 0.02 inches.

See reverse for Ez-Flex brush with Integrated Holder. Ez-Flex strip brush will fit in Sealeze aluminum holders. Please visit our website at sealeze.com/ind/holders.html for complete information.

Ez-Flex® Strip Brush with Integrated Holder [ENGLISH]

Worksheet [R. 04.2015]



All measurements in inches unless specified.




Contact Name: _____

Company Name: _____

Phone: _____

Fax: _____

Email: _____

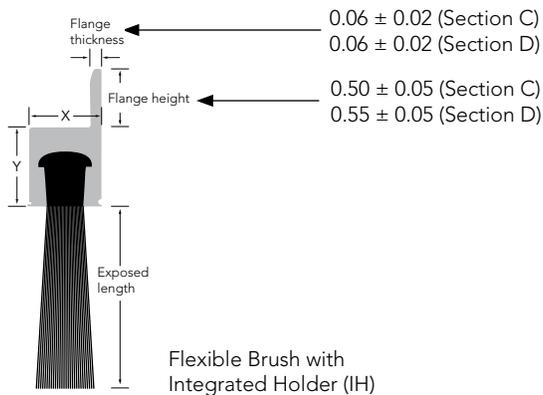

Flexible Strip Brush with Integrated Holder

Section	Product Code Nylon	Standard Filament Diameter	X*	Y*	Flange Thickness ±0.01	Flange Height ±0.06	Exposed [†] ± 0.015	Standard Continuous Length (feet)
C	FXC80IH06BL	0.006	0.18	0.19	0.06	0.50	0.62	10
	FXC80IH10BL	0.006	0.18	0.19	0.06	0.50	1.03	10
D	FXD80IH09BL	0.008	0.22	0.25	0.06	0.55	0.93	10
	FXD80IH12BL	0.008	0.22	0.25	0.06	0.55	1.18	10
	FXD80IH16BL	0.012	0.22	0.25	0.06	0.55	1.60	10
	FXD80IH20BL	0.012	0.22	0.25	0.06	0.55	1.99	10
	FXD80IH30BL	0.012	0.22	0.25	0.06	0.55	2.99	10

* Tolerance for C section; ±0.01. Tolerance for D section; ± 0.02 inches
[†] Exposed filament from bottom of integrated holder (filament length)

Specifications

Annual Usage (total feet): _____

Product Code: _____

Filaments

C Channel (level only): _____
 (0.004 in to 0.016 in)

D Channel (level or crimped): _____
 (0.004 in to 0.020 in)

Channel material*

Nylon

Filament Diameter: _____

Quantity: _____

Cut length if less than 100 ft: _____

Application: _____

* Integrated holder and filament must be of the same material.

Due to the nature of extruded plastic materials, please note the dimensional tolerances and take these into consideration when incorporating these products into your design.

Ez-Flex is available with other filament diameters. Please ask your sales representative for details. Standard brush material is Nylon (code BL). Crimped filament is available on D section. Ez-Flex flexible strip brush can be provided in continuous lengths in rolls (typically 100 feet) or as individual strips cut to your specifications.