


# Inverted Arc with Aluminum Holder

Worksheet [R. 02.2015]

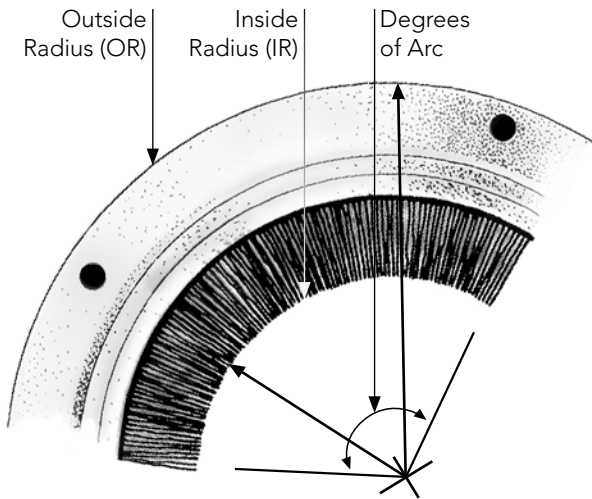

Contact Name: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

180° Holder with brush shown



## CHANNEL DIMENSIONS

Section	X		Y	
	in	mm	in	mm
A	0.095	2.413	0.110	2.794
B	0.150	3.810	0.152	3.861
C	0.180	4.572	0.199	5.055
D	0.240	6.096	0.256	6.502
F	0.313	7.950	0.313	7.950
G	0.350	8.890	0.370	9.398
K	0.500	12.700	0.500	12.700

## MINIMUM OR for INVERTED ARC with FORMED ALUMINUM HOLDER

Section	Product Code *	180°		90°		Angled Holders
		in	mm	in	mm	
A	IAA1	2.500	63.500	2.000	50.800	On Application
B	IAB1	3.000	76.200	2.500	63.500	On Application
C	IAC1	3.500	88.900	3.000	76.200	On Application
D	IAD1	3.750	95.250	3.250	82.550	On Application
F	IAF1	On Application		On Application		On Application
G	IAG1	5.000	127.000	4.000	101.600	On Application
K	IAK1	On Application		On Application		On Application

\* T-304 S/S Channel change "1" to "2". Other S/S available on request.

## Specifications

Quantity: \_\_\_\_\_

Annual Usage: \_\_\_\_\_

Channel Material: \_\_\_\_\_

Galvanized, T-304 S/S, Other S/S available on request

Holder Product Code: \_\_\_\_\_

(see Sealeze Catalog or web site)

Inverted Arc Product Code \_\_\_\_\_

Filament Material: \_\_\_\_\_

Level or Crimped: \_\_\_\_\_

Filament Diameter: \_\_\_\_\_

Degrees of Arc: \_\_\_\_\_

OR (Outside Radius of Holder): \_\_\_\_\_

IR (Inside Radius of Brush): \_\_\_\_\_

Hole Diameters: \_\_\_\_\_

Hole Location: \_\_\_\_\_

Please Circle the Critical Dimension:

OR IR

Application: \_\_\_\_\_