


Astragal Brush Seal

Worksheet [R. 11.2014]

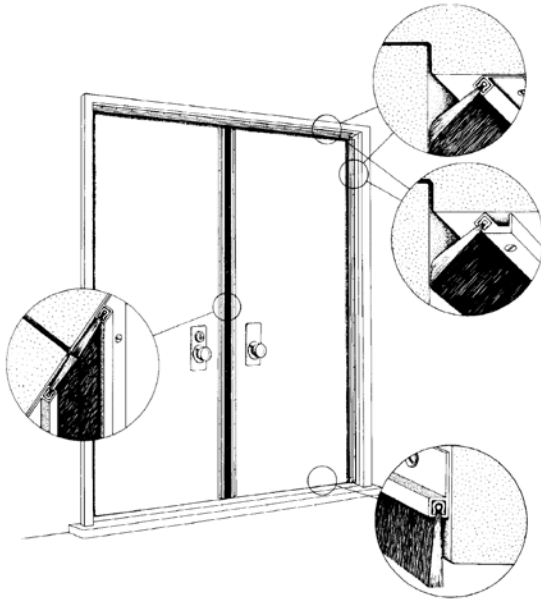

Contact Name: _____

Company Name: _____

Phone: _____

Fax: _____


Email: _____

1. Measure the height of the door along the inside edge (indicate in. or mm): _____
2. Measure the gap between the inside edges of the doors (indicate in. or mm): _____
3. Determine what color or finish you want for the brush holder (gold, silver, dark brown): _____
4. Select the proper astragal seal Product Code based on the color/finish desired, the door height and the gap to be sealed. Indicate the quantity needed: _____

ASTRAGAL SEAL KITS

Product Code	Holder Color	Door Height		Seals Gaps Up To	
		ft	m	in	mm
A180CLA04BL14	clear (silver)	7.000	2.134	0.625	15.875
A180DUR04BL14	dark brown	7.000	2.134	0.625	15.875
A180GLD04BL14	Brass (gold)	7.000	2.134	0.625	15.875
C380CLA06BL14	clear (silver)	7.000	2.134	1.000	25.400
C380DUR06BL14	dark brown	7.000	2.134	1.000	25.400
C380GLD06BL14	Brass (gold)	7.000	2.134	1.000	25.400
A180CLA04BL16	clear (silver)	8.000	2.438	0.625	15.875
A180DUR04BL16	dark brown	8.000	2.438	0.625	15.875
A180GLD04BL16	Brass (gold)	8.000	2.438	0.625	15.875
C380CLA06BL16	clear (silver)	8.000	2.438	1.000	25.400
C380DUR06BL16	dark brown	8.000	2.438	1.000	25.400
C380GLD06BL16	Brass (gold)	8.000	2.438	1.000	25.400

Refer to the appropriate Sealeze Worksheet for Door Jambs.

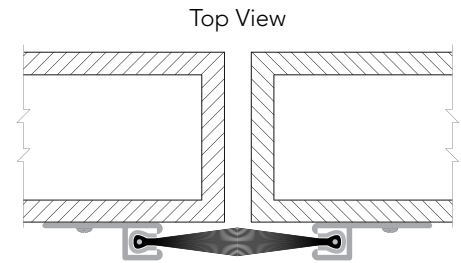

Note: Install astragal brush seals so that when the doors close the brushes just touch. Do not overlap. If door sweeps are installed, astragal brush seals should be installed on the opposite side of the door.



Sealeze Nylon Therm-L-Brush® up to 4 in. long are UL labeled for use on 3-hour fire doors.