


# Cup Seal

Worksheet [R. 02.2015]

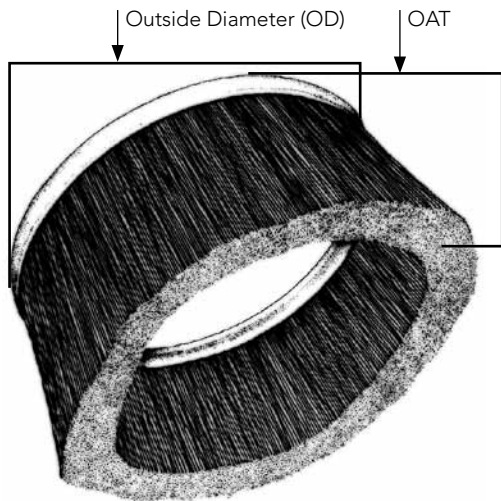

Contact Name: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_



## CHANNEL DIMENSIONS

| Section | X     |        | Y     |        |
|---------|-------|--------|-------|--------|
|         | in    | mm     | in    | mm     |
| A       | 0.095 | 2.413  | 0.110 | 2.794  |
| B       | 0.150 | 3.810  | 0.152 | 3.861  |
| C       | 0.180 | 4.572  | 0.199 | 5.055  |
| D       | 0.240 | 6.096  | 0.256 | 6.502  |
| F       | 0.313 | 7.950  | 0.313 | 7.950  |
| G       | 0.350 | 8.890  | 0.370 | 9.398  |
| K       | 0.500 | 12.700 | 0.500 | 12.700 |



## MINIMUM OD FOR CUP SEALS

| Section | Product Code * | Galvanized Channel |         | Stainless Channel |         | Stainless Filament |         |
|---------|----------------|--------------------|---------|-------------------|---------|--------------------|---------|
|         |                | in.                | mm      | in.               | mm      | in.                | mm      |
| A       | CFA1           | 1.000              | 25.400  | 1.500             | 38.100  | 1.750              | 44.450  |
| B       | CFB1           | 1.250              | 31.750  | 1.750             | 44.450  | 2.500              | 63.500  |
| C       | CFC1           | 1.500              | 38.100  | 2.000             | 50.800  | 3.250              | 82.550  |
| D       | CFD1           | 2.000              | 50.800  | 3.000             | 76.200  | 4.000              | 101.600 |
| F       | CFF1           | 2.750              | 69.850  | 3.625             | 92.075  | 4.625              | 117.475 |
| G       | CFG1           | 3.000              | 76.200  | 4.000             | 101.600 | 5.000              | 127.000 |
| K       | CFK1           | 10.000             | 254.000 | 12.000            | 304.800 | 15.000             | 381.000 |

\* T-304 S/S Channel change "1" to "2". Other S/S available on request

## Specifications

Quantity: \_\_\_\_\_

Annual Usage: \_\_\_\_\_

Channel Material: \_\_\_\_\_

Galvanized, T-304 S/S, Other S/S available on request

Filament Material: \_\_\_\_\_

Level or Crimped: \_\_\_\_\_

Filament Diameter: \_\_\_\_\_

Outside Diameter: \_\_\_\_\_

OAT: \_\_\_\_\_

Application: \_\_\_\_\_