

Ez-Flex® Strip Brush [METRIC]

Worksheet [R. 5.2013]



All measurements in millimeters unless specified.



Contact Name: _____

Company Name: _____

Phone: _____

Fax: _____

Email: _____

Specifications

Annual Usage (total feet): _____

Product Code: _____

Filament:

C Channel (level only): _____
(0.004 in to 0.016 in)

D Channel (level or crimped): _____
(0.004 in to 0.020 in)

Channel material*
Polypropylene or nylon: _____

Filament Diameter: _____

Quantity: _____

Cut length if less than 100 ft: _____

Application: _____

* Integrated holder and filament are of the same material.

Due to the nature of extruded plastic materials, please note the dimensional tolerances and take these into consideration when incorporating these products into your design.


Ez-Flex is available with other filament diameters. Please ask your sales representative for details. Standard brush material is Nylon (code BL). Polypropylene (code BP) is available. Crimped filament is available on D section. Ez-Flex flexible strip brush can be provided in continuous lengths in rolls (typically 30.5 m) or as individual strips cut to your specifications.



Channel Dimensions

Section	X*		Y*	
	in	mm	in	mm
C	0.180	4.572	0.200	5.080
D	0.230	5.842	0.245	6.223

* Tolerance for C & D sections, ±0.49 mm.



Flexible Brush

Flexible Brush with Aluminum Holder

Flexible Strip Brush

Section	Product Code Nylon	Product Code Polypro	Standard Filament Diameter	X*	Y*	OAT ±0.015	Standard Continuous Length (meters)
C	FXC106BL	FXC206BP	0.15	4.572	5.080	22.10	30.5
	FXC110BL	FXC210BP	0.15	4.572	5.080	32.51	30.5
D	FXD109BL	FXD209BP	0.20	5.842	6.223	31.75	30.5
	FXD112BL	FXD212BP	0.20	5.842	6.223	38.10	30.5
	FXD116BL	FXD216BP	0.30	5.842	6.223	48.77	30.5
	FXD120BL	FXD220BP	0.30	5.842	6.223	58.67	30.5
	FXD130BL	FXD230BP	0.30	5.842	6.223	84.07	30.5

* Tolerance for C & D sections, ±0.49 mm.

Ez-Flex strip brush will fit in Sealeze aluminum holders. Please visit our website at sealeze.com/ind/holders.html for complete information. See reverse for Ez-Flex brush with Integrated Holder.

Ez-Flex® Strip Brush with Integrated Holder [METRIC]



Worksheet [R. 11.2014]

All measurements in millimeters unless specified.




Contact Name: _____

Company Name: _____

Phone: _____

Fax: _____

Email: _____

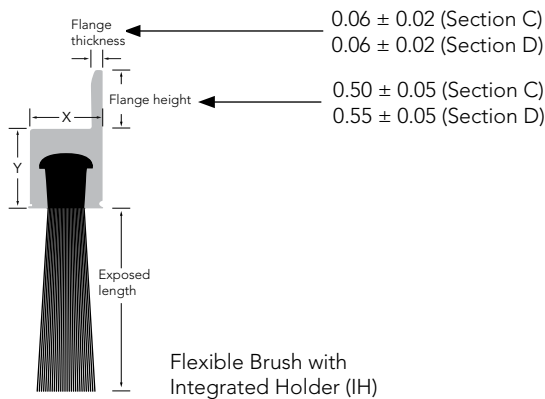

Specifications

Annual Usage (total feet): _____

Product Code: _____

Filaments

C Channel (level only): _____
(0.004 in to 0.016 in)

D Channel (level or crimped): _____
(0.004 in to 0.020 in)

Channel material*
Polypropylene or nylon: _____

Filament Diameter: _____

Quantity: _____

Cut length if less than 100 ft: _____

Application: _____

* Integrated holder and filament must be of the same material.

Due to the nature of extruded plastic materials, please note the dimensional tolerances and take these into consideration when incorporating these products into your design.

Ez-Flex is available with other filament diameters. Please ask your sales representative for details. Standard brush material is Nylon (code BL). Polypropylene (code BP) is available. Crimped filament is available on D section. Ez-Flex flexible strip brush can be provided in continuous lengths in rolls (typically 30.5 m) or as individual strips cut to your specifications.

Flexible Strip Brush with Integrated Holder

Section	Product Code Nylon	Product Code Polypro	Standard Filament Diameter	X‡	Y‡	Flange Thickness ±0.02	Flange Height ±0.05	Exposed [§] ± 0.015	Standard Continuous Length (meters)
C	FXC80IH06BL	FXC80IH206BP	0.15	4.57	4.83	1.52	12.70	15.75	3.05
	FXC80IH10BL	FXC80IH210BP	0.15	4.57	4.83	1.52	12.70	26.16	3.05
D	FXD80IH09BL	FXD80IH209BP	0.20	5.59	6.35	1.52	13.97	23.62	3.05
	FXD80IH12BL	FXD80IH212BP	0.20	5.59	6.35	1.52	13.97	29.97	3.05
	FXD80IH16BL	FXD80IH216BP	0.30	5.59	6.35	1.52	13.97	40.64	3.05
	FXD80IH20BL	FXD80IH220BP	0.30	5.59	6.35	1.52	13.97	50.55	3.05
	FXD80IH30BL	FXD80IH230BP	0.30	5.59	6.35	1.52	13.97	75.95	3.05

‡ Tolerance for C & D sections, ± 0.49 mm.

§ Exposed filament from bottom of integrated holder (filament length)