


# Inverted Arc

Worksheet [R. 03.2015]

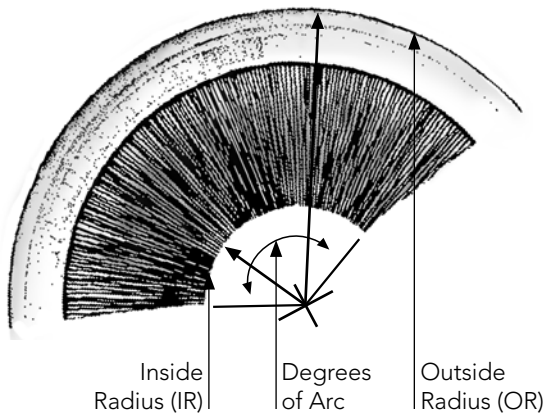

Contact Name: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

## Specifications

Quantity: \_\_\_\_\_

Annual Usage: \_\_\_\_\_

Product Code: \_\_\_\_\_

Channel Material: \_\_\_\_\_

Galvanized, T-304 S/S, Other S/S  
available on request

Filament Material: \_\_\_\_\_

Level or Crimped: \_\_\_\_\_

Filament Diameter: \_\_\_\_\_

Degrees of Arc: \_\_\_\_\_

OR (Outside Radius): \_\_\_\_\_

IR (Inside Radius): \_\_\_\_\_

Please Circle the Critical Dimension:

OR IR

Application: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



## CHANNEL DIMENSIONS

Section	X		Y	
	in	mm	in	mm
A	0.095	2.413	0.110	2.794
B	0.150	3.810	0.152	3.861
C	0.180	4.572	0.199	5.055
D	0.240	6.096	0.256	6.502
F	0.313	7.950	0.313	7.950
G	0.350	8.890	0.370	9.398
K	0.500	12.700	0.500	12.700

## MINIMUM OR for INVERTED ARC

Section	Product Code *	Galvanized Channel		Stainless Channel		Stainless Filament	
		in.	mm	in.	mm	in.	mm
A	IAA1	0.313	7.950	0.500	12.700	N/A	N/A
B	IAB1	0.656	16.662	1.250	31.750	1.250	31.750
C	IAC1	1.094	27.788	1.875	47.625	2.125	53.975
D	IAD1	1.425	36.195	2.125	53.975	2.375	60.325
F	IAF1	1.750	44.450	2.625	66.675	2.875	73.025
G	IAG1	2.000	50.800	3.000	76.200	3.250	82.550
K	IAK1	4.000	101.600	4.000	101.600	7.000	177.800

\* T-304 S/S Channel change "1" to "2". Other S/S available on request.