


# Inverted Coil

Worksheet [R. 02.2015]

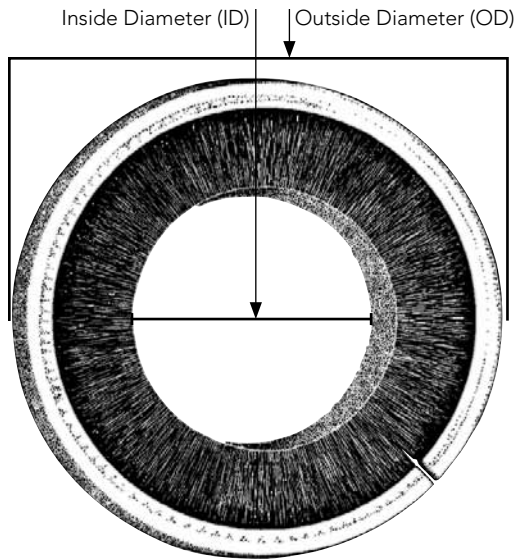

Contact Name: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

## Specifications

Quantity: \_\_\_\_\_

Annual Usage: \_\_\_\_\_

Product Code: \_\_\_\_\_

Channel Material: \_\_\_\_\_

Galvanized, T-304 S/S, Other S/S  
available on request

Filament Material: \_\_\_\_\_

Level or Crimped: \_\_\_\_\_

Filament Diameter: \_\_\_\_\_

Outside Diameter: \_\_\_\_\_

Inside Diameter: \_\_\_\_\_

Please Circle the Critical Dimension:

OD ID

Application: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



## CHANNEL DIMENSIONS

Section	X		Y	
	in	mm	in	mm
A	0.095	2.413	0.110	2.794
B	0.150	3.810	0.152	3.861
C	0.180	4.572	0.199	5.055
D	0.240	6.096	0.256	6.502
F	0.313	7.950	0.313	7.950
G	0.350	8.890	0.370	9.398
K	0.500	12.700	0.500	12.700

## MINIMUM OD FOR INVERTED COILS

Section	Product Code*	Galvanized Channel		Stainless Channel		Stainless Filament	
		in.	mm	in.	mm	in.	mm
A	ICA1	0.625	15.875	1.000	25.400	1.250	31.750
B	ICB1	1.312	33.325	2.500	63.500	2.500	63.500
C	ICC1	2.187	55.550	3.750	95.250	4.250	107.950
D	ICD1	2.850	72.390	4.250	107.950	4.750	120.650
F	ICF1	3.500	88.900	5.250	133.350	5.750	146.050
G	ICG1	4.000	101.600	6.000	152.400	6.500	165.100
K	ICK1	8.000	203.200	10.000	254.000	14.000	355.600

\* T-304 S/S Channel change "1" to "2". Other S/S available on request