


# Inverted Coil with Aluminum Holder


Worksheet [R. 01.2015]

Inside Diameter (ID) | Outside Diameter (OD)

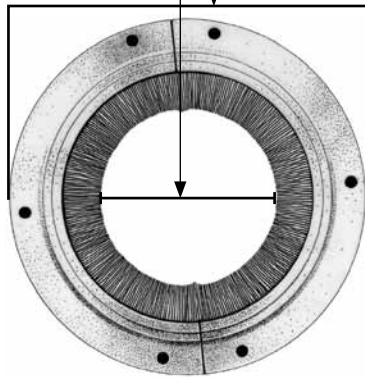

**Drawing A**

**Drawing A (180° Holder) :** Split Ring Shaft Seal shown above consists of two 180° arcs. Shaft seals are also available with three arcs (120°) and four arcs (90°). Custom arcs and single arc (360°) seals are available upon request. Consult your Sealeze Representative for minimum ODs.



**Drawing B**

**Drawing B:** Bolt holes will be centered on the flange unless specified.

Use this diagram to specify bolt hole locations.

Contact Name: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

## Specifications

**Quantity:** \_\_\_\_\_

**Annual Usage:** \_\_\_\_\_

**Channel Material:** \_\_\_\_\_  
Galvanized, T-304 S/S, Other S/S available on request

**Channel Size: A, B, C, D, G, K**

**Aluminum Holder Product Code:** \_\_\_\_  
(See Catalog or 'Brush Holders' on the Sealeze Website))

**Filament Material:** \_\_\_\_\_

**Level or Crimped:** \_\_\_\_\_

**Filament Diameter:** \_\_\_\_\_

**Outside Diameter of Holder:** \_\_\_\_\_

**Inside Diameter of Brush:** \_\_\_\_\_

**Hole Diameters:** \_\_\_\_\_

**Hole Location:** standard or as specified

**Number of Holes:** \_\_\_\_\_

**Please circle critical dimension:**  
**OD ID**

**Application:** \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



### CHANNEL DIMENSIONS

Section	X		Y	
	in	mm	in	mm
A	0.095	2.413	0.110	2.794
B	0.150	3.810	0.152	3.861
C	0.180	4.572	0.199	5.055
D	0.240	6.096	0.256	6.502
F	0.313	7.950	0.313	7.950
G	0.350	8.890	0.370	9.398
K	0.500	12.700	0.500	12.700

### MINIMUM OD for ASSEMBLIES with FORMED ALUMINUM HOLDERS

Section	Product Code *	180°		90° (not shown)		Angled Holders
		in.	mm	in.	mm	
A	ICA1	5.000	127.000	4.000	101.600	On Application
B	ICB1	6.000	152.400	5.000	127.000	On Application
C	ICC1	7.000	177.800	6.000	152.400	On Application
D	ICD1	7.500	190.500	6.500	165.100	On Application
F	ICF1	On Application		On Application		On Application
G	ICG1	10.000	254.000	8.000	203.200	On Application
K	ICK1	On Application		On Application		On Application

\* T-304 S/S Channel change "1" to "2". Other S/S available on request.