

At **SEALEZE®**, we pride ourselves on our problem-solving product. Our elevator products are designed to provide a low-cost solution to maintain the elevator shaft environment. We are relentless in our pursuit of using brush designed solutions to maximize the benefit to our elevator customers.

SEALEZE® Heritage

In the 1970s **SEALEZE®** was the inventor and first US manufacturer of “The Original” strip brush for elevators. Since then, we have become the foremost innovator in brush solutions for a broad range of applications, due to our dedicated in-house customer service team focused on creating technical solutions for today’s business needs.

Why SEALEZE® Brushes for Elevators

- Low Cost Solution to Maintaining Hoistway Pressurization - eliminate 98.5% of air infiltration
- Reduce Maintenance Cost - prevent outside debris and moisture from damaging equipment
- Sound Deadening - reduce sound in and from the elevator hoistway
- Durability - brushes and brush holders are designed and life tested to withstand 2 million cycles
- Simple Install - easy installation with pre-drilled holes and fasteners provided
- UL approved for use on 3-hour fire doors
- Designed and Made in USA





Elevator Program

Making it simple to do business with SEALEZE®.

- Simple ordering process. Easy to choose the right parts.
- Vertically integrated factory allows for fast and error free delivery.
- Best in class customer service. We are here for you when you need us.

Elevator Brush covers the following door types and brush applications

- Two Speed Opening Doors – Left or Right-Side Door Opening
- Side Opening Doors – Left or Right-Side Door Opening
- Center Door Opening Doors – Center Door Opening

General Information

How to choose your product

- Indicate door type (as referenced above)
- Enter dimensions L x W
- Enter required bristle length (0.5" or 1")
- The two most common elevators sizes are:
 - 7.0' tall x 3.6' wide (84" x 43.2")
 - 8.0' tall x 4.0' wide (96" x 48) with a bristle length of 1"
 - 1" gap size (bristle length) is most standard

Easy to install

- Cut to order includes pre-drilled slots, screws, brush and holder assembly.
- Upon request, we can include UL labels.



We will be happy to advise you! Our application engineers will be happy to look at your application and help you choose the right tool to ensure that cycle time, machining results and cost-per-part are optimized. Get in touch with us today.

800 787 7325 • sealezeorders@sealeze.com



Elevator Door Types & Ordering Requirements



Two Speed Opening Doors – Left or Right-Side Door Opening

Part number guide, referencing the line drawing and the corresponding letters

Letter Key	Part Number	Where to Apply	Gap Size	Angle Holder
A	B215CLA05BL	Header	.5"	15°
A	B215CLA10BL	Header	1"	15°
B, C, D, E	B210CLA05BL	Sill and (L & R) Jamb and Slow/Fast Gap	.5"	180° (straight)
B, C, D, E	B210CLA10BL	Sill and (L & R) Jamb and Slow/Fast Gap	1"	180° (straight)



Line drawing of where **SEALEZE®** brushes are used

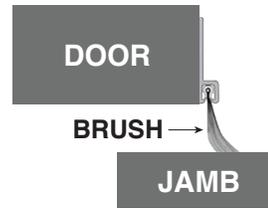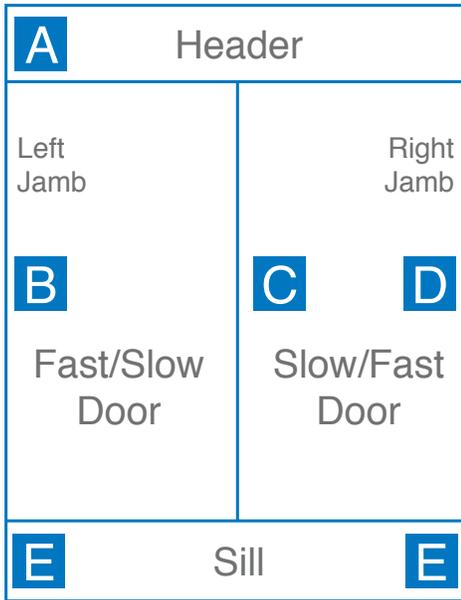



Elevator Door Types & Ordering Requirements


Side Opening Doors – Left or Right-Side Door Opening

Part number guide, referencing the line drawing and the corresponding letters

Letter Key	Part Number	Where to Apply	Gap Size	Angle Holder
A	B215CLA05BL	Header	.5"	15°
A	B215CLA10BL	Header	1"	15°
B, D, E	B210CLA05BL	Sill and (L & R) Jamb	.5"	180° (straight)
B, D, E	B210CLA10BL	Sill and (L & R) Jamb	1"	180° (straight)



Line drawing of where SEALEZE® brushes are used

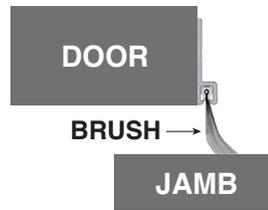



Elevator Door Types & Ordering Requirements

Center Door Opening Doors – Center Door Opening

Part number guide, referencing the line drawing and the corresponding letters

Letter Key	Part Number	Where to Apply	Gap Size	Angle Holder
A	B215CLA05BL	Header	.5"	15°
A	B215CLA10BL	Header	1"	15°
B, D, E	B210CLA05BL	Sill and (L & R) Jamb	.5"	180° (straight)
B, D, E	B210CLA10BL	Sill and (L & R) Jamb	1"	180° (straight)
F, G	B230CLA05B	Center Opening (middle gap)	.5"	30°
F, G	B230CLA10BL	Center Opening (middle gap)	1"	30°



Line drawing of where **SEALEZE®** brushes are used

